


Aboveground Storage Tanks, ULC-S601, Double-Wall, Vacuum-Monitored, Vertical

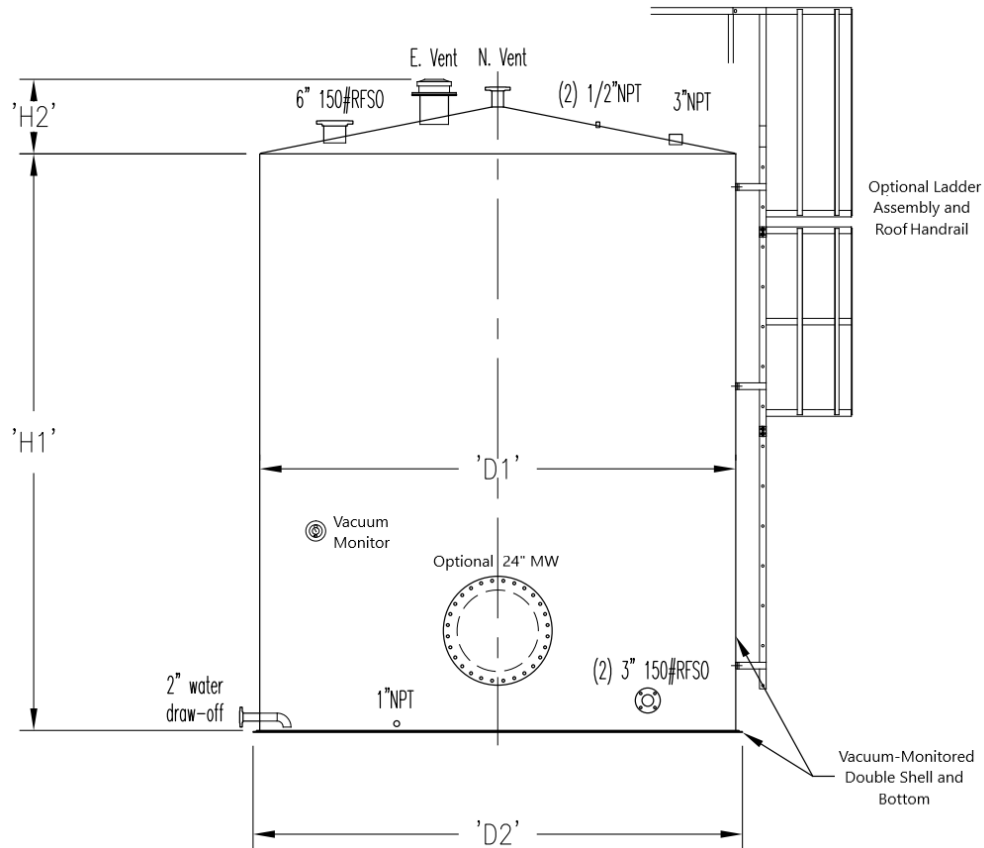

Part Number	Capacity (L)	D1 (in)	D2 (in)	H1 (in)	H2 (in)	Approx. Weight (lbs)
SCVAFT015000V	15,000	99	101	122	16	5700
SCVAFT025000V	25,000	99	101	202	16	8400
SCVAFT035000V	35,000	115	118	210	17	11,600
SCVAFT050000V	50,000	115	118	300	17	15,700
SCVAFT060000V	60,000	123	126	314	18	17,600
SCVAFT075000V	75,000	138	141	312	20	20,500
SCVAFT090000V	90,000	138	141	374	20	23,900
SCVAFT100000V	100,000	138	141	414	20	26,000
SCVAFT125000V	125,000	150	153	438	21	30,300
SCVAFT150000V	150,000	150	153	525	21	35,400

Design Notes

- 1) All tanks designed, manufactured, and labeled in accordance with ULC-S601-14
- 2) Material of construction: carbon steel (standard), stainless steel (available)
- 3) Exterior finish: SSPC-SP6, one coat primer, one coat white enamel
- 4) Rated normal vent: 3" (all listed sizes)
- 5) Rated emergency vent: 10" (15,000 - 35,000 L), 12" (Above 35,000 L)
- 6) Each tank includes vacuum-gauge assembly