


Aboveground Storage Tanks, ULC-S601, Double-Wall, Vacuum-Monitored, Horizontal

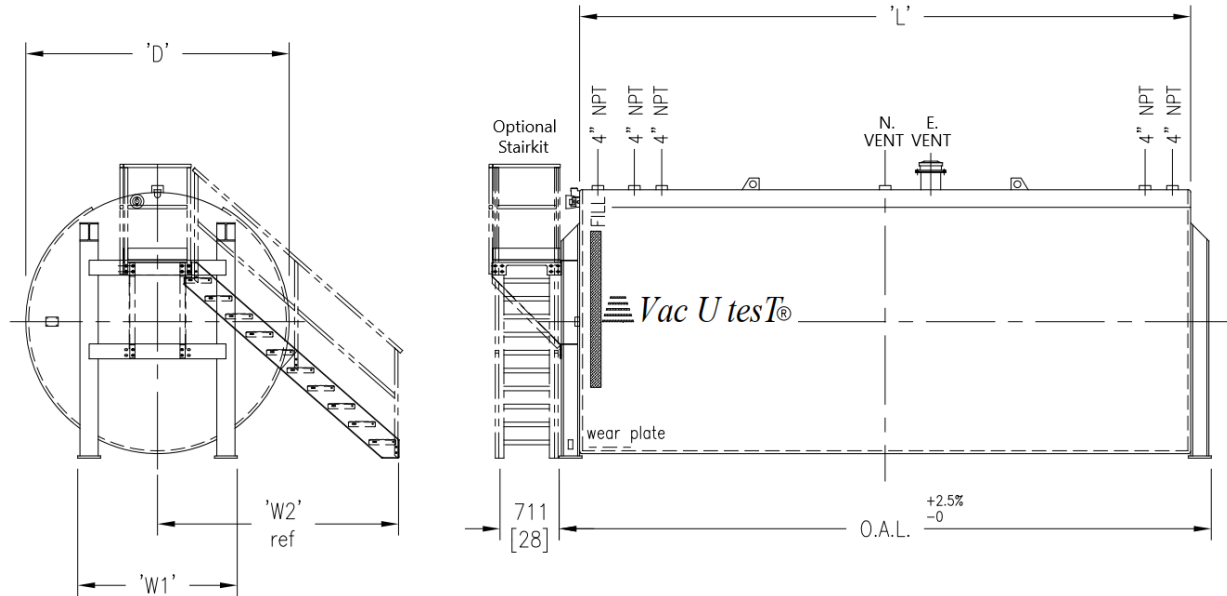

Part Number	Capacity (L)	Dia. (in)	Length (in)	O.A.L. (in)	W1 (in)	W2 (in)	Approx. Weight (lbs)
SCVAFT010000H	10,000	79	129	145	50	71	4900
SCVAFT015000H	15,000	79	192	208	50	71	6600
SCVAFT025000H	25,000	99	204	222	60	89	11,000
SCVAFT035000H	35,000	99	285	303	60	89	14,100
SCVAFT045000H	45,000	115	271	289	70	107	16,500
SCVAFT050000H	50,000	115	300	318	70	107	17,800
SCVAFT065000H	65,000	115	390	408	70	107	21,800
SCVAFT075000H	75,000	115	450	466	70	107	24,500
SCVAFT090000H	90,000	125	456	478	70	125	27,600
SCVAFT100000H	100,000	125	508	530	70	125	30,100
SCVAFT125000H	125,000	138	520	542	82	134	39,800
SCVAFT150000H	150,000	156	487	513	94	152	44,700

Design Notes

- 1) Each tank designed, manufactured, and labeled in accordance with ULC-S601-14
- 2) Material of construction: carbon steel (standard), stainless steel (available)
- 3) Exterior finish: SSPC-SP6, one coat primer, one coat white enamel
- 4) Rated normal vent: 2" (Up to 15,000 L), 3" (Above 15,000 L)
- 5) Rated emergency vent: 6" (Up to 25,000 L), 8" (Above 25,000 L)
- 6) Each tank includes vacuum gauge and interstitial vent