


**Aboveground Storage Tanks, ULC-S601, Single-Wall, Horizontal**

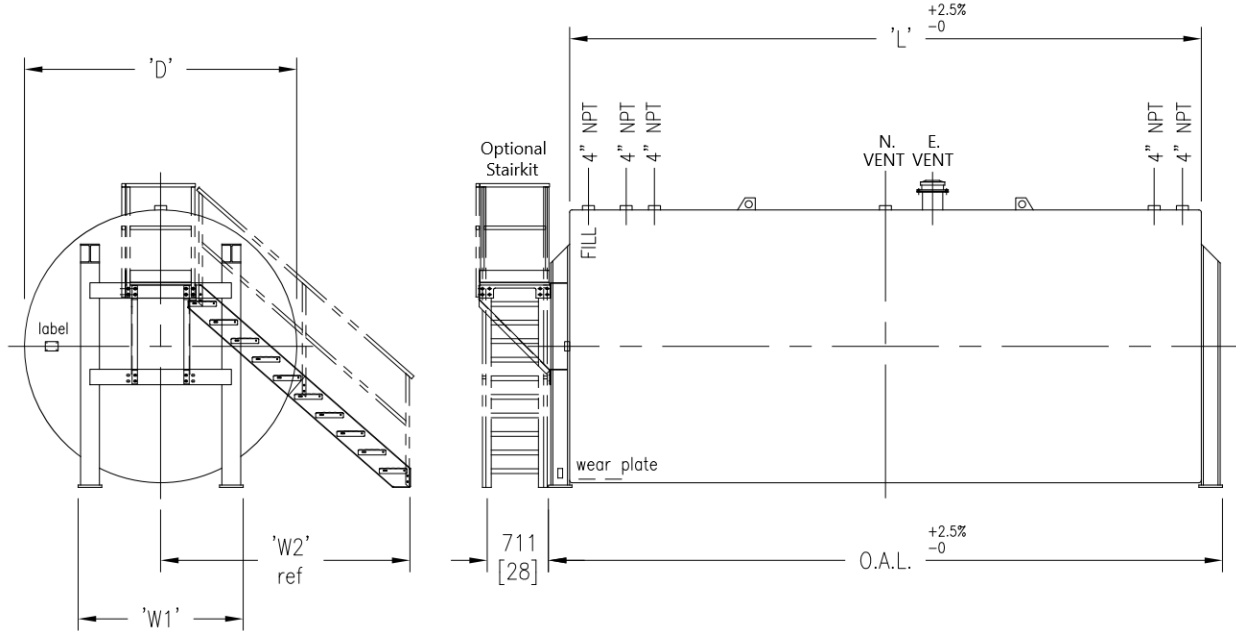

Part Number	Capacity (L)	Dia. (in)	Length (in)	O.A.L. (in)	W1 (in)	W2 (in)	Approx. Weight (lbs)
SCSWFT010000H	10,000	79	127	143	50	71	2700
SCSWFT015000H	15,000	79	190	206	50	71	3500
SCSWFT025000H	25,000	99	202	220	60	89	6500
SCSWFT035000H	35,000	99	281	299	60	89	8200
SCSWFT045000H	45,000	115	268	286	70	107	9700
SCSWFT050000H	50,000	115	298	316	70	107	10,500
SCSWFT065000H	65,000	115	386	404	70	107	12,700
SCSWFT075000H	75,000	115	448	464	70	107	14,300
SCSWFT090000H	90,000	125	452	474	70	125	16,200
SCSWFT100000H	100,000	125	500	522	70	125	17,500
SCSWFT125000H	125,000	138	518	540	82	134	25,000
SCSWFT150000H	150,000	156	484	510	94	152	28,500

**Design Notes**

- 1) All tanks designed, manufactured, and labeled in accordance with ULC-S601-14
- 2) Material of construction: carbon steel (standard), stainless steel (available)
- 3) Exterior finish: SSPC-SP6, one coat primer, one coat white enamel
- 4) Rated normal vent: 2" (Up to 15,000 L), 3" (Above 15,000 L)
- 5) Rated emergency vent: 6" (Up to 25,000 L), 8" (Above 25,000 L)