


Aboveground Storage Tanks, ULC-S655, Double-Wall, Fireguard, Vertical

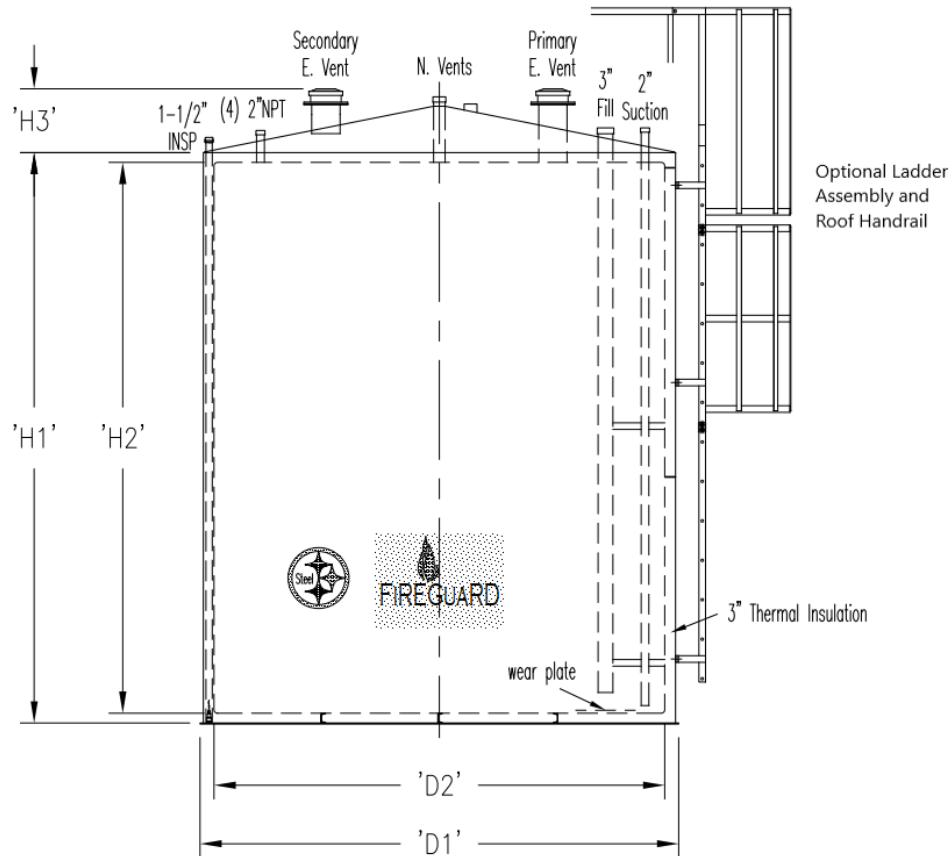

Part Number	Capacity (L)	D1 (in)	D2 (in)	H1 (in)	H2 (in)	H3 (in)	Approx. Weight (lbs)
SCFGFT01362V	1362	57	48	52	49	15	2200
SCFGFT02270V	2270	69	60	52	50	17	3200
SCFGFT04540V	4540	94	84	56	49	12	4900
SCFGFT06800V	6800	94	84	81	74	12	6100
SCFGFT10000V	10000	94	84	121	112	12	8100
SCFGFT15000V	15000	108	99	131	123	12	10,600
SCFGFT25000V	25000	138	129	125	118	14	17,200
SCFGFT35000V	35000	166	156	120	113	19	22,500

Design Notes

- 1) All tanks designed, manufactured, and labeled in accordance with ULC-S655
- 2) Material of construction: carbon steel (standard), stainless steel (available)
- 3) Exterior finish: SSPC-SP6, one coat primer, one coat white enamel
 - 4) Rated normal vent: 2" (up to 5000 L), 3" (above 5000 L)
- 5) Rated emergency vent: 3" (< 2500 L), 4" (< 10,000 L), 6" (< 25,000 L), 8" (> 25,000 L)
- 6) Each tank includes interstitial inspection pipe and liquid level sensor
- 7) Encasement designed for protection against fire, vehicle impact, and small arms attack